

PACKMAX

CUSTOM DESIGN & PRECISION MANUFACTURING OF PACKAGING MACHIMERY



SPOUT SEALING



1st Floor, Kadambari 1 Complex, Beside Data House,
Madhumati Society, Vejalpur, Ahmedabad, Gujarat – 380051.



www.packmax.co.in





info@packmax.co.in



+91 9909 983 536

TECHNICAL OVERVIEW

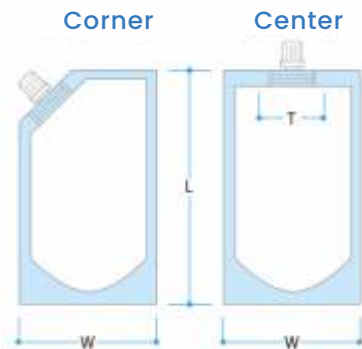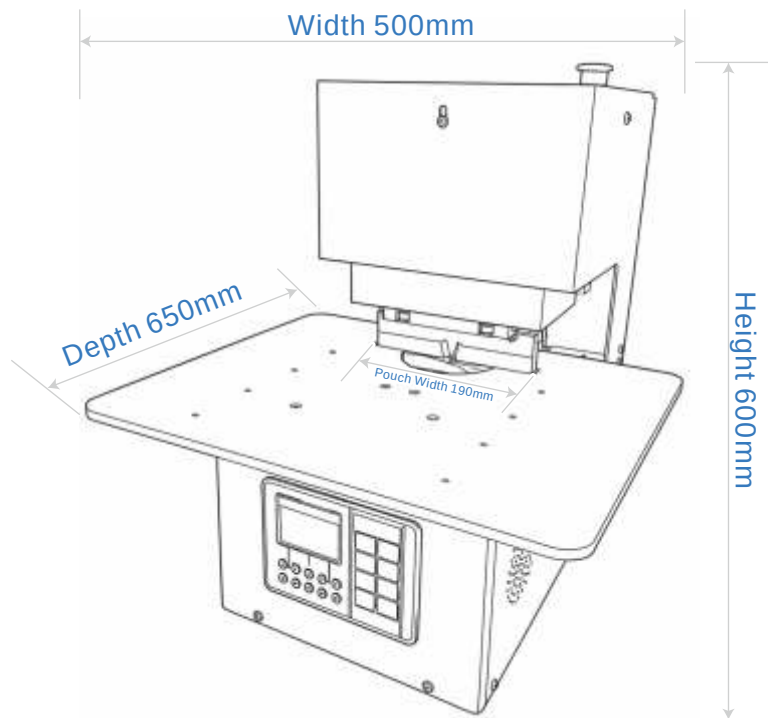

Spout Sealing Capability: 2.5 mm–33 mm



Machine Specifications

Key performance, pouch range and utility requirements.

Machine Model Number : PMX-SF001

Pouch type	Three Side Seal / Stand-Up Pouch
Pouch size range	74–250 mm (W) x 100–300 mm (H)
Production range	Max. up to 10–15 pouches per minute
Machine size	500 (L) x 650 (W) x 600 mm (H), approx.
Compressed air	3 CFM @ 6 BAR
Chilled water	2 litre/min @ 15–20 °C
Electrical supply	AC, Single-Phase, 215 V, 50 Hz
Connected load	1 kW Approx.
Temperature controller	P.I.D. type – Mitsubishi, Japan
Pneumatic items	S.M.C / FESTO
Machine Weights	44.5 kg
Safety	Cover With Auto Stop

VIDEO



Note: One Spout Sealer and cooling set with Machine (Sample Required 10 Nos. Min.)

PACKMAX

1st Floor, Kadambari 1 Complex, Beside Data House, Madhumati Society, Vejalpur, Ahmedabad, Gujarat – 380051.

www.packmax.co.in info@packmax.co.in +91 9909 983 536